

Generalised sequential crossover of words and languages

L Jeganathan, R Rama, and Ritabrata Sengupta

Department of Mathematics
Indian Institute of Technology
Chennai 600 036, India
lj, ramar, rits@iitm.ac.in

Abstract. In this paper, we propose a new operation, Generalised Sequential Crossover (GSCO) of words, which in some sense an abstract model of crossing over of the chromosomes in the living organisms. We extend GSCO over language L iteratively ($GSCO^*(L)$) as well as iterated GSCO over two languages $GSCO^*(L_1, L_2)$. Our study reveals that $GSCO^*(L)$ is subclass of regular languages for any L . We compare the different classes of GSCO languages with the prominent sub-regular classes.

1 Introduction

Self-assembly is a process in which smaller objects selectively aggregate with each other into a complex structure, which in turn self assemble into larger aggregates. It is a process wide spread in nature - atoms self assemble into molecules, molecules into crystals, cells into tissues, etc. It is an important tool in nano-technology, since it takes nature as a model and tries to assemble structures from the atomic level (bottom-up approach). Self-assembly is considered as a promising technique in nano-technology, enabling the fabrication of small complex objects - such as computer circuits.

A particular case of self assembly is that of a linear self assembly, in which one dimensional objects such as DNA double strands interact with each other to form longer strands. DNA recombination is one such DNA self assembly by which Adleman solved an instance of Hamiltonian path problem [1]. For more than a decade now, self assembly is the core of most experiments in DNA computing starting with the celebrated experiment of Adleman [1, 10, 22]. Recent developments in DNA computing have highlighted the intimate connection between self assembly and computation. Computational utilities of DNA self assembly is studied in [27].

Most complexity theoretic studies of self assembly utilise mathematical models. Some alternate models, like self assembly of the objects by the use of capillary force, electrostatic force, and magnetic force were also studied.

In recent years, one can see convergent interests in the study of self assembly from Mathematics, Computer science, Physics, Chemistry, and Biology point of view. Yet the mechanisms of these processes are so far little understood and pose a formidable challenge. Attempts were made to study the self assembly in different frameworks like ‘tile based self-assembly’ [5, 16, 27–29]. Perhaps the best model for self assembly was proposed by [29]. With an aim of making the process of self assembly more clear, studies of abstract models, such as self assembly of strings was initiated [7]. In [4] authors introduce an operation among strings and languages, called “superposition”, which is similar to the Csuhaaj-Varjú’s operation called self assembly on strings, but their approaches are different.

Inspired by the different models of self-assembly, in particular the string self assembly of Csuhaaj-Varjú [7], we planned to propose a string based operation which may be a generalisation of self-assembly operation proposed in Csuhaaj-Varjú’s paper [7]. In Csuhaaj-Varjú’s model, two strings uv and vw self assemble over v and generate uvw . Here v is the overlapping string. Then comes the question : What will be the process if we do not restrict the overlapping string to be in the end of the first string and in the beginning of the second string. As an answer to the above question we propose a new operation on two strings. Two strings u_1xv_1 and u_2xv_2 self assemble over the substring x (also called overlapping string, $x \neq \varepsilon$) and generate the strings u_1xv_2 and u_2xv_1 as illustrated in figure 1.

Normally, in any self-assembly process, no portion of the components (that take part in the self-assembly) should be lost. In that sense, our new operation on strings (where some portions of the strings are lost) can no longer be called as the abstraction of the self-assembly process.

But, our operation resembles in one sense, the recombination process of chromosomes by exchanging the segments between homologous chromosomes, called crossing-over. A chromosome is a single piece of DNA




Fig. 1. A scheme for crossover of two strings

that contains many genes, regulatory elements and other nucleotide sequences. Each gene occupies a well-defined site or locus in its chromosome, having corresponding locations in the pair of homologous chromosomes. Chromosomal cross over (or crossing over) is the process by which two chromosomes pair up and exchange their DNA. Crossover usually occurs when matching regions on matching chromosomes (homologous chromosomes) break and then reconnect to the other chromosomes. The result of this process is an exchange of genes, called genetic recombination, which leads to the genetic variability. Crossover can occur at one or more points along the adjacent chromosomes.

In [20], an operation on strings and languages having the same feature is introduced. Every chromosome is considered as a string. The operation is applicable to a pair of strings of equal length as the crossing over is between the homologous chromosomes.

Each string is cut in several fragments, but in the sites for both of them and crossing these fragments by ligases. A new string, of the same length, is formed by starting at the left end of one parent, copying a segment, crossing over to the next site in the other parent, copying a substring, crossing back to the first parent and so on until the right end of one parent is reached. Obviously, another new string can be obtained by starting with the other parent. This crossover operation [20] among the strings is similar to the chromosome crossing-over. A generalisation of the splicing system is proposed in [21].

Our proposal, two strings u_1xv_1 and u_2xv_2 overlap at the substring x and generate the strings u_1xv_2 and u_2xv_1 , differs with the cross-over operation in two aspects. First, in our model, words of different lengths can participate in a crossover. Second, crossing over occurs at only one site between the words. For these reasons, we call our operation as *Generalised Sequential Cross Over (GCSO)*. We use the adjective *generalised* in the sense that crossover can occur between any two words of any length and the adjective *sequential* in the sense that the crossover occurs between any two words at only one point(site) in contrary to the occurrence at one or more points between the chromosomes.

Any two strings may share more than one common overlap and so the result of GCSO of two strings is in general a set of strings. As usual in formal language theory, we extend GCSO to a language, iterated version of GCSO over a language.

Our study answers several questions in the sense of nano-scale fabrication; like - can we decide if a given language can be obtained by iterated GCSO and if so can we effectively construct a minimal finite set of initial strings. Given such a finite set of strings, what language can be generated by the GCSO?

Though the operation GCSO is just an abstraction of the crossover operation introduced in [20], our study reveals many interesting results such as: iterated GCSO of any language will always be regular, and a subclass of GCSO languages matches exactly with the strictly locally testable language (SLT) [18] leading to a new characterisation of SLT language using iterated GCSO.

Section 2 deals with the preliminaries required for this paper. Section 3 introduces the GCSO operation on words and languages along with some basic results. Section 4 discusses a variant of GCSO. Section 4 shows that the operations 1-GCSO and 2-GCSO over a language L are the same. Two types of iterations are defined for GCSO and their equivalence is discussed in section 5. Section 6 discusses the regularity of GCSO languages. Section 7 compares the GCSO languages with the other regular subclasses.

2 Preliminaries

Throughout this paper, we assume that the reader is familiar with the fundamental concepts of formal language theory and automata, i.e. notations of grammar and finite automata [14]. We list here some notations and notions we use in this paper.

2.1 Basic notations of formal language theory

An alphabet is always a finite set of letters denoted by Σ . The set of all words over an alphabet Σ is denoted by Σ^* . The empty word is denoted by ε . Further $\Sigma^+ = \Sigma^* \setminus \{\varepsilon\}$. Given a word w , the number of symbols in w is the length of the word and is denoted by $|w|$. A word v is a sub-word (in literature, it is also called as *factor*) of a word w if there are words u_1 and u_2 (possibly empty) such that $w = u_1vu_2$. v is called prefix of w ($\text{Prefix}(w)$) if $w = vu$. Similarly v is called the suffix of w ($\text{Suffix}(w)$) if $w = uv$. $\text{Prefix}(L) = \{\text{Prefix}(w) : w \in L\}$ and $\text{Suffix}(L) = \{\text{Suffix}(w) : w \in L\}$. The notation Σ_x means the set of symbols of Σ that occurs in the word x . u_x means the word u which is a sub-string of a word x . $|u|_x$ is the number of occurrence of x in u . For a fixed x (which is a sub-string of u), $|u|_x^r$ is the total number of the occurrence of x to the right of x . We define a function I_x over the $\text{sub}(x)$ such that,

$$I_x : \text{sub}(x) \longrightarrow N$$

$$I_x(u) = |u|_x - |u|_x^r.$$

The class of regular language is defined by REG. Every finite automaton induces a right invariant equivalence relation defined on the set of input strings which is formalised in the following theorem (see [14])

Theorem 1 (Myhill-Nerode). *The following statements are equivalent.*

1. *The set $L \subseteq \Sigma^*$ is accepted by some finite automaton.*
2. *L is the union of some of the equivalence classes of a right invariant equivalence relation of finite index.*
3. *Let equivalence relation R_L be defined by xR_Ly if and only if $\forall z \in \Sigma^*$, $xz \in L$ exactly when $yz \in L$. Then R_L is of finite index.*

2.2 Splicing

A splicing rule (over alphabet Σ) is a quadruple (u_1, u_2, u_3, u_4) of words $u_1, u_2, u_3, u_4 \in \Sigma^*$ which is often written as follows: $u_1\#u_2\$u_3\#u_4$. Here $\#$ and $\$$ are splicing symbols which are not in Σ . A splicing rule $r = u_1\#u_2\$u_3\#u_4$ is applicable to two words $x = x_1u_1u_2x_2$ and $y = y_1u_3u_4y_2$. The splicing of the words x and y by the splicing rule $u_1\#u_2\$u_3\#u_4$, produces two new words $w_1 = x_1u_1u_4y_2$ and $w_2 = y_1u_3u_2x_2$. In this case we write $(x, y) \vdash_r (w_1, w_2)$. This operation is also called 2-splicing. We can take only w_1 as a result instead of both of them. In that case the corresponding operation is called 1-splicing and is denoted by $(x, y) \vdash w_1$.

A pair $\sigma = (\Sigma, R)$ where Σ is an alphabet and R is a set of splicing rules is called a splicing scheme or a H -scheme. For an H -scheme $\sigma = (\Sigma, R)$ and a language $L \subseteq \Sigma^*$, we define

$$\sigma(L) = \{w_1, w_2 \in \Sigma^* \mid x, y \in L, r \in R, (x, y) \vdash_r w_1, w_2\}$$

where x, y, w_1, w_2 and r are specified above. The iterative version of the splicing operation is defined as

$$\sigma^0(L) = L$$

$$\sigma^{i+1}(L) = \sigma^i(L) \cup \sigma(\sigma^i(L))$$

$$\sigma^*(L) = \bigcup_{i \geq 0} \sigma^i(L)$$

H -system is a construct $H = (\Sigma, A, R)$ where Σ is a finite alphabet, $A \subseteq \Sigma^*$ is a set of initial words over Σ , called axiom and $R \subseteq \Sigma^*\#\Sigma^*\$\Sigma^*\#\Sigma^*$ is a set of splicing rules. The language generated by $H = (\Sigma, A, R)$ is $\sigma^*(A)$. Thus the language generated by the H -system is the set of all words that can be generated starting with A , as initial words and by iteratively applying splicing rules from R to the words already generated.

A H -system is called a ‘null context H -system’ (NCH) if R is a finite subset of Σ^* . The language generated by NCH is the smallest language L in Σ^* that contains A and has the property that whenever strings wrx and yrz are in L , $r \in R$; the strings wrz and yrx are also in L . A language L is called a null context splicing language (NCH-language) if there exists a null context splicing system that generates L [12]. Simple H -system [19] is a H -system (Σ, A, R) , where $R \subseteq \Sigma$ such that for $x, y, z \in \Sigma^*$ and $a \in R$; $(x, y) \vdash^a z$ if and only if $x = x_1ax_2$, $y = y_1ay_2$, $z = x_1ay_2$, for $x_1, x_2, y_1, y_2, a \in \Sigma^*$. The family of simple H -systems is a subclass of NCH systems. SH is the family of languages generated by a simple splicing system.

2.3 Constant

The concept of a constant, as introduced by Schutzenberger [26] is a valuable conceptual tool for splicing theory, given out many years before the proposal of the theory of splicing. A string $c \in \Sigma^*$ is a constant for a language L over an alphabet Σ if, whenever wcx and ycz are in L , both wcz and ycx are also in L . A string y is a factor of a string w if $w = xyz$ for some $x, y \in \Sigma^*$ and that y is a factor of a language L if y is a factor of some string in L . Further each rule of a NCH system G is necessarily a constant for the language $L(G)$.

2.4 Strictly locally testable languages

The concept of strictly locally testable languages was introduced by McNaughton and Papert in [18]. Later, De Luca and Restivo [17] gave a characterisation for such languages, using the concept of constants [26]. We give the definition of strictly locally testable languages as in [18] and the characterisation of it as in [17].

Definition 1 [18] *A subset X of A^+ is called strictly locally testable if a positive integer k and three subsets U, V, W of A^k exist such that: $X \cap A^k A^* = (UA^* \cap A^*V) \setminus A^*WA^*$.*

Class of strictly locally testable languages is denoted by SLT

Definition 2 *Characterisation of SLT [17]: A Language L is a SLT if there is a positive integer k for which every factor of L of length k is a constant.*

3 Generalised Sequential Crossover

Definition 3 *Generalised sequential crossover scheme $GSCO = (\Sigma, R)$, where Σ is the finite alphabet, $R \subseteq \Sigma^*$ be the finite set of overlapping strings; we write $GSCO = (\Sigma, R)$ as $GSCO_R$. $GSCO_R$ is also called a R -crossover. When R is singleton, say $R = \{x\}$, we write $GSCO_x$ instead of $GSCO_R$.*

For a given $GSCO$ scheme $GSCO$ and two words $w_1 = u_1xv_1$ and $w_2 = u_2xv_2 \in \Sigma^*$, we define

$$GSCO_x(w_1, w_2) = \{u_1xv_2, u_2xv_1 \in \Sigma^* : w_1 = u_1xv_1, w_2 = u_2xv_2, \varepsilon \neq x \in R\}.$$

The scheme is shown in figure 1.

Instead of writing $GSCO_x(u_1xv_1, u_2xv_2)$, we also write $u_1xv_1 \succ^x u_2xv_2 = \{u_1xv_2, u_2xv_1\}$, which means that the two strings u_1xv_1 and u_2xv_2 crossover over the sub-string x to generate two new words u_1xv_2 and u_2xv_1 . We also write $u_1xv_1 \succ^x u_2xv_2 = \{u_1xv_2, u_2xv_1\}$ instead of $(u_1xv_1, u_2xv_2) \succ^x \{u_1xv_2, u_2xv_1\}$. Then

$$GSCO_R(w_1, w_2) = \bigcup_{x \in R} w_1 \succ^x w_2.$$

Obviously R should contain words which are sub-words found in both w_1 and w_2 , otherwise $GSCO_R(w_1, w_2)$ will be empty. We call the operation $GSCO_x$, $x \in \Sigma$ as the symbol overlapping GSCO. Similarly we call $GSCO_x$, $x \in \Sigma^*$ as the string overlapping GSCO. Let $\text{sub}(w)$ be the set of all sub-words of w . If in a GSCO scheme $R = \text{sub}(w_1) \cap \text{sub}(w_2)$, we simply write $GSCO(w_1, w_2)$, i.e. $GSCO(w_1, w_2)$ is the set of all words that can be generated by the GSCO of w_1 and w_2 with all possible overlapping. In other words,

$$GSCO(w_1, w_2) = \bigcup_x GSCO_x(w_1, w_2), \quad x \in \text{sub}(w_1) \cap \text{sub}(w_2).$$

We do not crossover two strings with ε as the overlapping string.¹

¹ Out of curiosity we record the result

$$GSCO_\varepsilon(w_1, w_2) = \text{Pref}(w_1).\text{Suff}(w_2) \cup \text{Pref}(w_2).\text{Suff}(w_1).$$

We extend the above definition to languages. Given any two languages L_1 and L_2 over the alphabet Σ_1 and Σ_2 respectively such that $\Sigma_1 \cap \Sigma_2 \neq \emptyset$, we define

$$GSCO_R(L_1, L_2) = \bigcup_{\substack{w_1 \in L_1 \\ w_2 \in L_2}} GSCO_R(w_1, w_2).$$

Here the underlying crossover scheme is $GSCO = (\Sigma_1 \cup \Sigma_2, R)$. As mentioned earlier, when $R = \text{sub}(L_1) \cap \text{sub}(L_2)$ (R is the set of all possible overlapping between a word of L_1 and a word of L_2).

$$GSCO_R(L_1, L_2) = \bigcup_{\substack{w_1 \in L_1 \\ w_2 \in L_2}} GSCO(w_1, w_2).$$

$GSCO(L, L)$ is written as just $GSCO(L)$.

We record some results, whose proofs are immediate.

Proposition 1 *Let $u, v \in \Sigma^*$.*

1. $GSCO_x(u, v) = GSCO_y(u, v)$ where the sub-word x occurs in y only once and no two symbols of x are same.
2. $GSCO_x(u, v) \supseteq GSCO_y(u, v)$, x is a sub-word of y .
3. If $R \subseteq R'$, $GSCO_R(u, v) \subseteq GSCO_{R'}(u, v)$.
4. $GSCO_{R_1 \cup R_2}(u, v) = GSCO_{R_1}(u, v) \cup GSCO_{R_2}(u, v)$.
5. $GSCO_{R_1 \cap R_2}(u, v) = GSCO_{R_1}(u, v) \cap GSCO_{R_2}(u, v)$.
6. $GSCO_a(GSCO_a(u, v), u) = GSCO(u, GSCO_a(u, v))$, $a \in \Sigma$.
7. $GSCO_a(GSCO_a(u, v), v) = GSCO(v, GSCO_a(u, v))$, $a \in \Sigma$.
8. If $GSCO_a(u, v) = \{x, y\}$, then $GSCO_a(x, y) = \{u, v\}$, i.e. the operation $GSCO_a$, $\forall a \in \Sigma$ is reversible.
9. The length of the words in $GSCO(u, v)$ will range from 1 to $|u| + |v| - 1$.
10. $GSCO(w, w) = w$ if no two symbols of w are same.
11. $GSCO$ operation is not associative over words, but commutative over words. In fact $GSCO(L_1, L_2) = GSCO(L_2, L_1)$.
12. $GSCO(a^i, a^j) = \{a, a^2, \dots, a^{i+j-1}\}$.
13. For any two languages, L_1 and L_2

$$GSCO(L_1 \cup L_2) = GSCO(L_1) \cup GSCO(L_2) \cup GSCO(L_1, L_2).$$

14. $GSCO(w, w^R) = \{uau^R : u \in \text{Prefix}(w), a \in \Sigma\}$.
15. For any two words $w_1, w_2 \in \Sigma^*$, and $x \in \text{sub}(w_1) \cap \text{sub}(w_2)$,

$$GSCO_x(w_1, w_2) \subseteq GSCO_{a \in \Sigma_x}(w_1, w_2).$$

If a word is generated by a string overlapping (x overlapping) $GSCO$ of w_1 and w_2 , then the word can also be generated by a symbol (that occurs in x) overlapping.

Proof. All but the last of the above statements follows directly from the definition. We only prove the last one (statement 15). Let $u \in GSCO_x(w_1, w_2)$, $x \in \text{sub}(w_1) \cap \text{sub}(w_2)$. If $x \in \Sigma$, then the proof is immediate.

Let $x \notin \Sigma$, $|x| \geq 2$. Let $x = a_1 a_2 \dots a_n$, where some a_i 's may be same. Suppose $w_1 = u_1 a_1 a_2 \dots a_n v_1$, $w_2 = u_2 a_1 a_2 \dots a_n v_2$. Then $u \in \{u_1 a_1 a_2 \dots a_n v_2, u_2 a_1 a_2 \dots a_n v_1\}$.

Case I $u = u_1 a_1 a_2 \dots a_n v_2$.

$$u \in GSCO_{a_i}(w_1, w_2), i \in \{1, 2, \dots, n\} \Rightarrow u \in GSCO_{a \in \Sigma_x}(w_1, w_2).$$

Hence $GSCO_x(w_1, w_2) \subseteq GSCO_{\Sigma_x}(w_1, w_2)$.

Case II $u = u_2 a_1 a_2 \dots a_n v_1$. We get the result similarly. Hence the proof.

Note 1. The other way of the statement 15 is not true, i.e.

$$GSCO_{a \in \Sigma_x}(w_1, w_2) \not\subseteq GSCO_x(w_1, w_2).$$

As an example: $GSCO_{aba}(c_1 abac_2, d_1 abad_2) = \{c_1 abad_2, d_1 abac_2\}$. But $GSCO_a(c_1 abac_2, d_1 abad_2) = \{c_1 abad_2, d_1 abac_2, c_1 ad_2, d_1 ababac_2, c_1 ababad_2, d_1 ac_2\}$.

Example 1. $GSCO(\{a^n : n \geq 1\}) = a^+$.

Example 2. $GSCO(\{a^n b^n : n \geq 1\}) = a^+ b^+$.

Example 3. Let $L = \{ab, ba, bb\}$.

$$\begin{aligned} ab \succless ab &= \{ab\} & ab \succless ba &= \{a, b, bab, aba\} \\ ab \succless bb &= \{ab, bb, b, abb\} & ba \succless bb &= \{b, bb, ba, bba\} \\ ba \succless ba &= \{ba\} & bb \succless bb &= \{bb\}. \end{aligned}$$

So we have

$$GSCO(L) = \{a, b, ab, ba, bb, aba, bab, abb, bba\}.$$

Example 4. $GSCO(\{a, b\}) = \{a, b\}$.

Example 5. $GSCO(\{abcab, c\}) = \{ab, abc, cab, abcabcab\}$.

In computing $GSCO(w_1, w_2)$, one has to first compute all the common sub-strings x and compute $\bigcup_x GSCO_x(w_1, w_2)$. For $GSCO(L)$ we have to compute $\bigcup_{w_1, w_2 \in L} GSCO(w_1, w_2)$. In short,

$$GSCO(L) = \bigcup_{w_1, w_2 \in L} \bigcup_x GSCO_x(w_1, w_2), \quad x \in \text{sub}(w_1) \cap \text{sub}(w_2),$$

which increases the complexity of the computation of GSCO. We have the following theorem to reduce this tedious calculation of finding all the common sub-strings of all the pairs of words of a given language L .

Theorem 2. Let $w_1, w_2 \in \Sigma^*$.

$$GSCO(w_1, w_2) = \bigcup_{a \in \Sigma_{w_1} \cap \Sigma_{w_2}} GSCO_a(w_1, w_2).$$

Proof. Since

$$GSCO(w_1, w_2) = \bigcup_{x \in \text{sub}(w_1) \cap \text{sub}(w_2)} GSCO_x(w_1, w_2),$$

it is enough if we prove that:

$$\bigcup_{x \in \text{sub}(w_1) \cap \text{sub}(w_2)} GSCO_x(w_1, w_2) = \bigcup_{a \in \Sigma_{w_1} \cap \Sigma_{w_2}} GSCO_a(w_1, w_2).$$

Since $\Sigma_{w_1} \cap \Sigma_{w_2} \subseteq \text{sub}(w_1) \cap \text{sub}(w_2)$,

$$GSCO_{\Sigma_{w_1} \cap \Sigma_{w_2}}(w_1, w_2) \subseteq GSCO_{\text{sub}(w_1) \cap \text{sub}(w_2)}(w_1, w_2).$$

$$\bigcup_{a \in \Sigma_{w_1} \cap \Sigma_{w_2}} GSCO_a(w_1, w_2) \subseteq \bigcup_{x \in \text{sub}(w_1) \cap \text{sub}(w_2)} GSCO_x(w_1, w_2).$$

To prove the other way, let $u \in GSCO_x(w_1, w_2)$. If $x \in \Sigma_{w_1} \cap \Sigma_{w_2}$, then the proof is obvious. Suppose $|x| \geq 2$ (i.e. x is a common sub-string of w_1 and w_2). By the result 15 of proposition 1, there exists a symbol in x , say a , (i.e. $a \in \Sigma_x$) such that $u \in GSCO_a(w_1, w_2)$. Since $a \in \Sigma_x$, $x \in \text{sub}(w_1) \cap \text{sub}(w_2)$, we have $a \in \Sigma_{w_1} \cap \Sigma_{w_2}$. This implies $u \in GSCO_{a \in \Sigma_{w_1} \cap \Sigma_{w_2}}(w_1, w_2)$. Hence

$$GSCO_x(w_1, w_2) \subseteq GSCO_{a \in \Sigma_{w_1} \cap \Sigma_{w_2}}(w_1, w_2).$$

$$\Rightarrow \bigcup_{x \in \text{sub}(w_1) \cap \text{sub}(w_2)} GSCO_x(w_1, w_2) \subseteq \bigcup_{a \in \Sigma_{w_1} \cap \Sigma_{w_2}} GSCO_a(w_1, w_2).$$

Corollary 1. $GSCO(w_1, w_2) = \bigcup_{a \in \Sigma} GSCO_a(w_1, w_2)$.

Proof. It is enough if we prove that

$$\bigcup_{a \in \Sigma_{w_1} \cap \Sigma_{w_2}} GSCO_a(w_1, w_2) = \bigcup_{a \in \Sigma} GSCO_a(w_1, w_2).$$

The alphabet

$$\Sigma = (\Sigma_{w_1} \cap \Sigma_{w_2}) \cup A, \quad (1)$$

where A contains the symbols of Σ which are not in $\Sigma_{w_1} \cap \Sigma_{w_2}$, i.e. the alphabet Σ can be written as a disjoint union of the two sets with respect to the words w_1 and w_2 .

$$\bigcup_{a \in A} GSCO(w_1, w_2) = \bigcup_{a \notin \Sigma_{w_1} \cap \Sigma_{w_2}} GSCO(w_1, w_2) = \emptyset. \quad (2)$$

By result 4 of proposition 1, (1) implies

$$\begin{aligned} \bigcup_{a \in \Sigma} GSCO_a(w_1, w_2) &= \left(\bigcup_{a \in \Sigma_{w_1} \cap \Sigma_{w_2}} GSCO(w_1, w_2) \right) \bigcup \left(\bigcup_{a \in A} GSCO_a(w_1, w_2) \right) \\ \Rightarrow \bigcup_{a \in \Sigma} GSCO_a(w_1, w_2) &= \bigcup_{a \in \Sigma_{w_1} \cap \Sigma_{w_2}} GSCO(w_1, w_2). \end{aligned}$$

Hence the proof.

Corollary 2. $GSCO(L) = \bigcup_{w_1, w_2 \in L} \bigcup_{a \in \Sigma} GSCO_a(w_1, w_2)$.

Proof.

$$\begin{aligned} GSCO(L) &= \bigcup_{w_1, w_2 \in L} GSCO(w_1, w_2) \\ &= \bigcup_{w_1, w_2 \in L} \bigcup_{a \in \Sigma} GSCO_a(w_1, w_2). \end{aligned}$$

This corollary tells us that to compute $GSCO(L)$ it is enough to compute the GSCO of w_1 and w_2 over the symbols of the alphabet Σ and take the union of all those $GSCO(w_1, w_2)$'s.

3.1 CGSCO

We mention a special type of the operation GSCO viz., Corresponding GSCO (CGSCO).

Definition 4 (CGSCO) *Given any two words w_1, w_2 , and let x be a common sub-string of them such that in both w_1 and w_2 , x occurs more than once. We crossover w_1 and w_2 in such a way that the first occurrence of x in w_1 overlaps with the first occurrence of x in w_2 (second occurrence in w_1 crossover with second occurrence of x in w_2 and so on). We call such a GSCO as Corresponding GSCO.*

As an example $CGSCO(\underline{abcab}, \underline{abab}) = \{ab, abab, abcab\}$. The sub-strings which occurs in both the strings more than once are ab, a, b . Here we do not allow the overlap of the first occurrence of ab in $abcab$ with second occurrence of ab in $abab$.

As seen in proposition 1, result 15 we have

$$GSCO_x(w_1, w_2) \subseteq GSCO_{a \in \Sigma_x}(w_1, w_2).$$

There are some GSCO's for which the equality holds; i.e. for every symbol overlapping GSCO of w_1 and w_2 , there exists a string overlapping GSCO of w_1 and w_2 . If x is a common sub-string in w_1 and w_2 , then any sub-string of x is also a common string, GSCO can occur by the overlapping of the sub-string of x also. Result 1 of the proposition 1 tells that $GSCO_x(w_1, w_2) \supseteq GSCO_y(w_1, w_2)$ where $x \subseteq y$. To compute the $GSCO(w_1, w_2)$ we

have to consider all the possible common sub-strings. But for the GSCO systems, which satisfies the property $GSCO_{a \in \Sigma_x}(w_1, w_2) = GSCO_x(w_1, w_2)$, of theorem 2. To calculate $GSCO(w_1, w_2)$ it is enough to compute $GSCO_{a \in \Sigma_x}(w_1, w_2)$ where x is the maximal common sub-string of w_1 and w_2 (A common sub-string x is said to be maximal if there is no common sub-string y such that x is a sub-string of y), i.e.

$$GSCO(w_1, w_2) = \bigcup_x GSCO_{a \in \Sigma_x}(w_1, w_2),$$

where x is the common maximal sub-string of w_1 and w_2 .

Theorem 3. *A GSCO is a CGSCO if and only if*

$$GSCO_x(w_1, w_2) = \bigcup GSCO_{a|x}(w_1, w_2)$$

Here a_x is any symbol from the sub-string x such that $I_{w_1}(x) = I_{w_2}(x)$. $GSCO_{a|x}$ is an operation where the overlapping occurs over a which is a sub-string of x and not elsewhere.

Proof. Let the GSCO be a CGSCO. Let w_1 and w_2 be any two words. Let x be a common sub-string of w_1 and w_2 . $|w_1|_x = |w_2|_x = n$. Since the GSCO is a CGSCO, w_1 and w_2 can crossover over x only for n times. Let x occurs n times in w_1 and m times in w_2 .

In the calculation of $GSCO_x(w_1, w_2)$ we have to consider all the possible overlapping of x , i.e. any x in w_1 can overlap with any x in w_2 . Let $x = a_1 a_2 \dots a_k$, $w_1 = u_1 x u_2 x u_3 \dots x u_{n+1}$, $w_2 = v_1 x v_2 x v_3 \dots x v_{m+1}$. We have assumed that GSCO is a CGSCO. Moreover, we have to consider such x overlapping such that $I(x_{w_1}) = I(x_{w_2})$, i.e. we calculate $GSCO_x(w_1, w_2)$ when the i th occurrence of x in w_1 overlaps with the i th occurrence of x in w_2 . In such a case,

$$GSCO_x(w_1, w_2) = \{u_1 x v_2 x v_3 \dots x v_{n+1}, v_1 x u_2 x u_3 \dots x u_{n+1}; \dots; u_1 x u_2 x v_3 \dots u_n x v_{n+1}, v_1 x v_2 x v_3 \dots v_n x u_{n+1}\}. \quad (3)$$

We consider the sub-string x in w_1 and sub-string x in w_2 such that $I(x_{w_1}) = I(x_{w_2})$. This means if we consider x which occurs i th time in w_1 we have to crossover it with the i th occurrence of x in w_2 as a sub-string.

Consider x such that $I_{w_1}(x) = I_{w_2}(x) = 1$, i.e. the x which occurs first time in w_1 as well as in w_2 . Let a be any symbol in the sub-string x , $a = a_i$ say.

By hypothesis GSCO is a CGSCO. We compute $CGSCO_{a|x}(w_1, w_2)$. $CGSCO_{a|x_i}(w_1, w_2)$ means that the overlapping occurs between the i th occurrence of a in x which occurs in w_1 and the i th occurrence of a in x which occurs in w_2 . In our case, if a is the i th symbol in x_{w_1} then a is also the i th symbol in x_{w_2} . a can occur many times in x , but the overlapping of a has to take place in the corresponding position for $CGSCO_{a|x}$.

$$\begin{aligned} CGSCO_{a|x}(w_1, w_2) &= CGSCO_{a|x}(u_1 a_1 \dots a_k u_2 x \dots x u_{n+1}, v_1 a_1 \dots a_k v_2 x \dots x v_{n+1}) \\ &= \{u_1 a_1 \dots a_l a_{l+1} a_k v_2 x \dots x v_{n+1}, v_1 a_1 \dots a_l a_{l+1} a_k u_2 x \dots x u_{n+1}\} \\ &= \{u_1 x v_2 x \dots x v_{n+1}, v_1 x u_2 x \dots x u_{n+1}\} \end{aligned}$$

If $a = a_j$, and the crossover occurs over a_j in x_{w_1} and a_j in x_{w_2} . The calculation is similar, and we get

$$\begin{aligned} CGSCO_{a|x}(w_1, w_2) &= CGSCO_{a|x}(u_1 a_1 \dots a_k u_2 x \dots x u_{n+1}, v_1 a_1 \dots a_k v_2 x \dots x v_{n+1}) \\ &= \{u_1 a_1 \dots a_j a_{j+1} a_k v_2 x \dots x v_{n+1}, v_1 a_1 \dots a_j a_{j+1} a_k u_2 x \dots x u_{n+1}\} \\ &= \{u_1 x v_2 x \dots x v_{n+1}, v_1 x u_2 x \dots x u_{n+1}\} \end{aligned}$$

It does not matter, how many times a is repeated in x , as the crossover is taking place on its position of occurrence (in the sub-string x of both the words) only.

We repeat the case I for x such that $I(x_{w_1}) = I(x_{w_2}) = 2$. Arguing on similar line,

$$GSCO_{a|x}(w_1, w_2) = \{u_1 x u_2 x v_3 \dots x v_{n+1}, v_1 x v_2 x u_3 \dots x u_{n+1}\}.$$

Similarly we have

$$GSCO_{a|x}(w_1, w_2) = \{u_1 x u_2 x \dots u_i x v_{i+1} \dots x v_{n+1}, v_1 x v_2 x \dots v_i \dots x u_{i+1} \dots x u_{n+1}\} \text{ where } I(x_{w_1}) = I(x_{w_2}) = 2.$$

So we have

$$\bigcup_{\substack{I_{w_1}(x)=I_{w_2}(x) \\ =1}}^j GSCO_{a|x}(w_1, w_2) = \{u_1xu_2x \cdots u_jxv_{j+1} \cdots xv_{n+1}, \\ v_1xv_2x \cdots v_j \cdots xu_{j+1} \cdots xu_{n+1} : j = 1, 2, \dots, \min\{|w_1|_x, |w_2|_x\}\}. \quad (4)$$

By (3) and (4), we have the claim.

Given

$$GSCO_x(w_1, w_2) = \bigcup_{\substack{I(x_{w_1})=I(x_{w_2}) \\ =2}}^j GSCO_{a:x}(w_1, w_2),$$

to show that GSCO is a CGSCO.

Let the above claim be not true, i.e. GSCO is not a CGSCO. Choose $w_1 = u_1xu_2xu_3 \cdots xu_{n+1}$ and $w_2 = v_1xv_2xv_3 \cdots xv_{n+1}$. As we have noted earlier, the number of x -overlapping for a CGSCO depends on the minimum number of occurrences of x in the two words to be self-assembled. Hence, without loss of generality we may assume that both of them has the same number of x as a sub-word.

When the first occurrence of x in w_1 overlaps with the third occurrence of x in w_2 , we get two new words

$$u_1xv_4xv_5 \cdots v_{n+1}, v_1xv_2xv_3xu_2xu_3 \cdots u_{n+1} \in GSCO_x(w_1, w_2). \quad (5)$$

The above strings can only be generated by $GSCO_{a|x}(w_1, w_2)$ where $I_{w_1}(x) = 1$ and $I_{w_2}(x) = 3$. It can not be generated by $GSCO_{a|x}(w_1, w_2)$ where $I_{w_1}(x) = I_{w_2}(x)$. Hence

$$u_1xv_4xv_5 \cdots v_{n+1}, v_1xv_2xv_3xu_2xu_3 \cdots u_{n+1} \notin \bigcup_{\substack{I_{w_1}(x)=I_{w_2}(x) \\ =1}}^j GSCO_{a|x}(w_1, w_2). \quad (6)$$

(5) and (6) contradicts our hypothesis. Hence the GSCO is a CGSCO.

Corollary 3. $CGSCO_x(w_1, w_2) = CGSCO_{y|x}(w_1, w_2)$, where y is a sub-string of x .

Proof. The argument follows in the same line as in the previous theorem. Since we are dealing with a CGSCO; the first x of w_1 will match with the first x of w_2 . Again in this also

4 1-GSCO and 2-GSCO

In the theory of splicing, two types of splicing operations have been considered: the 1-splicing operation, when by applying a rule on two words, only one word is generated/considered; and the 2-splicing when both the two words are generated/considered.

In a similar line we introduce two operations: 1-GSCO and 2-GSCO. The operations GSCO over the words w_1 and w_2 generate two new words, each time when w_1 and w_2 overlap over a common sub-string x . For a common sub-string x , different overlaps are also possible. Collection of all such words is denoted by $GSCO_x(w_1, w_2)$. $GSCO(w_1, w_2)$ is a collection of all possible $GSCO_x(w_1, w_2)$'s. $GSCO(L)$ is the collection of all $GSCO(w_1, w_2)$'s for all possible pairs of $w_1, w_2 \in L$. Hence, the operation GSCO is made up of many 'overlapping', with each overlapping generating two words.

The operation GSCO is called 1-GSCO if in all the concerned overlapping, we consider the word which has the prefix of the first word and the suffix of the second word as the only word generated. So $1GSCO_x(u_1xv_1, u_2xv_2) = \{u_1xv_2\}$, i.e. the operation 1GSCO generates only one word. We denote 1GSCO by $>_1<$.

The operation GSCO is called 2GSCO if in all the concerned overlapping we consider both the words generated. So the operation 2GSCO coincides with GSCO.

Lemma 1 For the two words w_1, w_2




Fig. 2. A scheme for 1GSCO of two strings. Scheme for the output string u_1xv_2 is prominently shown. The grey part is the discarded self-assembled string.

1. $1GSCO_x(w_1, w_2) = 1GSCO_x(w_2, w_1)$, if and only if $w_1 = w_2$.
2. $1GSCO(w_1, w_2) \subseteq 2GSCO(w_1, w_2)$.
3. $1GSCO(w_1, w_2) \cup 1GSCO(w_2, w_1) = 2GSCO(w_1, w_2)$.

For any two languages L_1 and L_2 :

4. $1GSCO(L_1, L_2) \subseteq 2GSCO(L_1, L_2)$.
5. $1GSCO(L) = 2GSCO(L) = GSCO(L)$.

Proof. The results 1, 2, 3 and 4 are obvious. We prove the result 5. When the language L is a singleton set, $1 - GSCO(L) = 2 - GSCO(L)$.

$$\begin{aligned}
 1GSCO(L) &= \bigcup_{w_1, w_2 \in L} 1GSCO(\{w_1, w_2\}) \\
 &= \bigcup_{w_1, w_2 \in L} (1GSCO(w_1, w_2) \cup 1GSCO(w_2, w_2) \cup 1GSCO(w_1, w_1) \cup 1GSCO(w_2, w_2)) \\
 &= \bigcup_{w_1, w_2 \in L} (2GSCO(w_1, w_2) \cup 2GSCO(w_1, w_1) \cup 2GSCO(w_2, w_2)) \\
 &= \bigcup_{w_1, w_2 \in L} 2GSCO(\{w_1, w_2\}) \\
 &= 2GSCO(L).
 \end{aligned}$$

Since $2GSCO(L)$ is just $GSCO(L)$ we have the result.

In case of finite H-system 1-splicing operation is more powerful than 2-splicing. In GSCO system they coincide. By the result 5 of Lemma 1, to calculate $GSCO(L)$ it is enough to calculate $1GSCO(L)$, which is equivalent to $GSCO(L)$. From now onwards $GSCO(L)$ means either $1GSCO(L)$ or $2GSCO(L)$.

5 Iterated GSCO

Definition 5 Given a language L , we define the language obtained from L by unrestricted iterated application of GSCO. This language, called the unrestricted GSCO closure of L , denoted by $uGSCO^*(L)$, is defined as

$$\begin{aligned}
 uGSCO^0(L) &= L \\
 uGSCO^{i+1}(L) &= uGSCO^i(L) \cup uGSCO(uGSCO^i(L)) \\
 uGSCO^*(L) &= \bigcup_{i \geq 0} uGSCO^i(L)
 \end{aligned}$$

Clearly $uGSCO^*(L)$ is the smallest language containing L and is closed under GSCO. That is, it is the smallest language K such that $L \subseteq K$ and $GSCO(K) \subseteq K$. In other words, one starts with any pair of words in L and apply GSCO iteratively to any pair of words previously produced. All the obtained words are collected.

Definition 6 For a word w and a sub-string x of w we define the $\text{Prefix}_x(w)$, $\text{Suffix}_x(w)$ as follows:

$$\begin{aligned}\text{Prefix}_x(w) &= \{u : uxu' = w; u, u' \in \Sigma^*\} \\ \text{Suffix}_x(w) &= \{s : s'xs = w; s, s' \in \Sigma^*\} \\ \text{Prefix}_x(L) &= \bigcup_{w \in L} \text{Prefix}_x(w) \\ \text{Suffix}_x(L) &= \bigcup_{w \in L} \text{Suffix}_x(w).\end{aligned}$$

It is clear that

$$w_1 \succ_1^x w_2 = \text{Prefix}_x(w_1) \cdot x \cdot \text{Suffix}_x(w_2).$$

Lemma 2 For any word w ,

$$\text{Prefix}_x(\text{Suffix}_x(w)) = \text{Suffix}_x(\text{Prefix}_x(w)).$$

Proof. Let

$$\begin{aligned}u &\in \text{Suffix}_x(\text{Prefix}_x(w)). \\ \Leftrightarrow \exists u' \in \Sigma^* \text{ such that } u'xu &\in \text{Prefix}_x(w) \\ \Leftrightarrow \exists u'' \in \Sigma^* \text{ such that } u'xuu'' &= w \\ \Leftrightarrow uxu'' &\in \text{Suffix}_x(w) \\ \Leftrightarrow u &\in \text{Prefix}_x(\text{Suffix}_x(w)).\end{aligned}$$

Hence the proof.

Lemma 3 For any three words w_1, w_2, w_3

$$(w_1 \succ_1^x w_2) \succ_1^x w_3 = w_1 \succ_1^x (w_2 \succ_1^x w_3);$$

i.e. the operation 1GSCO_x is associative over the words.

Proof.

$$w_1 \succ_1^x w_2 = \text{Prefix}_x(w_1) \cdot x \cdot \text{Suffix}_x(w_2).$$

$$\begin{aligned}(w_1 \succ_1^x w_2) \succ_1^x w_3 &= [\text{Prefix}_x(w_1) \cdot x \cdot \text{Suffix}_x(w_2)] \succ_1^x w_3 \\ &= \text{Prefix}_x[\text{Prefix}_x(w_1) \cdot x \cdot \text{Suffix}_x(w_2)] \cdot x \cdot \text{Suffix}_x(w_3) \\ &= [(\text{Prefix}_x(\text{Prefix}_x(w_1) \cdot x)) \cup (\text{Prefix}_x(w_1) \cdot x \cdot \text{Prefix}_x(\text{Suffix}_x(w_2)))] \cdot x \cdot \text{Suffix}_x(w_3) \\ &= [\text{Prefix}_x(w_1) \cup \text{Prefix}_x(w_1) \cdot x \cdot \text{Prefix}_x(\text{Suffix}_x(w_2))] \cdot x \cdot \text{Suffix}_x(w_3) \\ &\quad [\text{form definition it follows that } \text{Prefix}_x(\text{Prefix}_x(w) \cdot x) = \text{Prefix}_x(w).] \\ &= \text{Prefix}_x(w_1) \cdot x \cdot \text{Suffix}_x(w_3) \cup \text{Prefix}_x(w_1) \cdot x \cdot \text{Prefix}_x(\text{Suffix}_x(w_2)) \cdot x \cdot \text{Suffix}_x(w_3)\end{aligned}\tag{7}$$

On the other hand, consider

$$w_2 \succ_1^x w_3 = \text{Prefix}_x(w_2) \cdot x \cdot \text{Suffix}_x(w_3).$$

$$\begin{aligned}w_1 \succ_1^x (w_2 \succ_1^x w_3) &= \text{Prefix}_x(w_1) \cdot x \cdot \text{Suffix}_x[\text{Prefix}_x(w_2) \cdot x \cdot \text{Suffix}_x(w_3)] \\ &= \text{Prefix}_x(w_1) \cdot x \cdot [\text{Suffix}_x(\text{Prefix}_x(w_2)) \cdot x \cdot \text{Suffix}_x(w_3) \cup (\text{Suffix}_x(x \cdot \text{Suffix}_x(w_3)))] \\ &= \text{Prefix}_x(w_1) \cdot x \cdot \text{Suffix}_x(\text{Prefix}_x(w_2)) \cdot x \cdot \text{Suffix}_x(w_3) \cup \text{Prefix}_x(w_1) \cdot x \cdot \text{Suffix}_x(w_3) \\ &\quad [\text{form definition it follows that } \text{Suffix}_x(x \cdot \text{Suffix}_x(w)) = \text{Suffix}_x(w).] \\ &= \text{Prefix}_x(w_1) \cdot x \cdot \text{Prefix}_x(\text{Suffix}_x(w_2)) \cdot x \cdot \text{Suffix}_x(w_3) \cup \text{Prefix}_x(w_1) \cdot x \cdot \text{Suffix}_x(w_3) \\ &\quad \text{from the previous lemma}\end{aligned}\tag{8}$$

From (7) and (8), we have

$$(w_1 \succ_1^x w_2) \succ_1^x w_3 = w_1 \succ_1^x (w_2 \succ_1^x w_3).$$

Note 2. Because of associativity of the operation we can write

$$(w_1 \succ_1^x w_2) \succ_1^x w_3 = w_1 \succ_1^x (w_2 \succ_1^x w_3) = w_1 \succ_1^x w_2 \succ_1^x w_3.$$

Corollary 4. For any languages L_1, L_2, L_3 we can write

$$L_1 \succ_1^x (L_2 \succ_1^x L_3) = (L_1 \succ_1^x L_2) \succ_1^x L_3.$$

Proof. The result is obvious as

$$L_1 \succ_1^x L_2 = \bigcup_{\substack{w_1 \in L_1 \\ w_2 \in L_2}} (w_1 \succ_1^x w_2).$$

Lemma 4 For any word $w \in GSCO_x^i(L)$, there exists a sequence of words $w^0, w^1, \dots, w^s \in L$ with $s \leq 2^i - 1$, such that

$$w \in w^0 \succ^x w^1 \succ^x \dots \succ^x w^n.$$

Proof. Let $w \in GSCO_x^i(L)$. We apply induction on i .

For $i = 1$; $w \in GSCO_x^1(L)$, i.e. $w \in GSCO_x(L, L)$. Hence, there exists two words $w_0, w_1 \in L$ such that $w \in w_0 \succ_1^x w_1$. Note that $w \in w \succ_1^x w$ for any w . Hence if $w \in L$, we shall write $w \in w \succ^x w$.

Let the statement be true for each $i = 1, 2, \dots, n$. We want to show that it holds for $i = n + 1$ as well.

Let $w \in GSCO^{n+1}(L)$. So there exists w' and $w'' \in GSCO^n(L)$ such that $w \in w' \succ_1^x w''$. By induction hypothesis, we can express

$$\begin{aligned} w' &\in w'_0 \succ^x w'_1 \succ^x \dots \succ^x w'_{2^n-1} & w'_0, w'_1, \dots, w'_{2^n-1} &\in L \\ w'' &\in w''_0 \succ^x w''_1 \succ^x \dots \succ^x w''_{2^n-1} & w''_0, w''_1, \dots, w''_{2^n-1} &\in L. \end{aligned}$$

Hence

$$w \in (w'_0 \succ^x w'_1 \succ^x \dots \succ^x w'_{2^n-1}) \succ^x (w''_0 \succ^x w''_1 \succ^x \dots \succ^x w''_{2^n-1}).$$

By associativity we can write

$$w \in w'_0 \succ^x w'_1 \succ^x \dots \succ^x w'_{2^n-1} \succ^x w''_0 \succ^x w''_1 \succ^x \dots \succ^x w''_{2^n-1}.$$

So w can be generated by x -crossover of 2^{n+1} words (may not be distinct) of L . Hence the lemma holds.

Theorem 4. For any three words w_1, w_2, w_3 over Σ^* ,

$$\bigcup_{a,b \in \Sigma} (w_1 \succ_a^x (w_2 \succ_b^x w_3)) = \bigcup_{a,b \in \Sigma} ((w_1 \succ_a^x w_2) \succ_b^x w_3).$$

Proof. Using the Prefix_x and Suffix_x notations mentioned earlier, we can write;

$$\begin{aligned} w_2 \succ_b^x w_3 &= \text{Prefix}_b(w_2) \cdot b \cdot \text{Suffix}_b(w_3), \\ w_1 \succ_a^x w_2 &= \text{Prefix}_a(w_1) \cdot a \cdot \text{Suffix}_a(w_2). \end{aligned}$$

$$\begin{aligned} w_1 \succ_a^x (w_2 \succ_b^x w_3) &= w_1 \succ_a^x (\text{Prefix}_b(w_2) \cdot b \cdot \text{Suffix}_b(w_3)) \\ &= \text{Prefix}_a(w_1) \cdot a \cdot \text{Suffix}_a \text{Prefix}_b(w_2) \cdot b \cdot \text{Suffix}_b(w_3) \\ &\quad \cup \text{Prefix}_a(w_1) \cdot a \cdot \text{Suffix}_a \text{Suffix}_b(w_3). \end{aligned} \tag{9}$$

Similarly we get

$$\begin{aligned} (w_1 \succ_a^x w_2) \succ_b^x w_3 &= (\text{Prefix}_a(w_1) \cdot a \text{Suffix}_a(w_2)) \succ_b^x w_3 \\ &= \text{Prefix}_a(w_1) \cdot a \cdot \text{Prefix}_b \text{Suffix}_a(w_2) \cdot b \cdot \text{Suffix}_b(w_3) \\ &\quad \cup \text{Prefix}_b \text{Prefix}_a(w_1) \cdot b \cdot \text{Suffix}_b(w_3). \end{aligned} \tag{10}$$

The statement of the theorem can be restated as

$$\left(\bigcup_{a=b} w_1 \succ^a \prec (w_2 \succ^b \prec w_3) \right) \bigcup \left(\bigcup_{a \neq b} w_1 \succ^a \prec (w_2 \succ^b \prec w_3) \right) = \\ \left(\bigcup_{a=b} (w_1 \succ^a \prec w_2) \succ^b \prec w_3 \right) \bigcup \left(\bigcup_{a \neq b} (w_1 \succ^a \prec w_2) \succ^b \prec w_3 \right).$$

That is to prove the theorem, it is enough if we prove

$$\left(\bigcup_{a=b} w_1 \succ^a \prec (w_2 \succ^b \prec w_3) \right) \bigcup \left(\bigcup_{a \neq b} (\text{Prefix}_a(w_1) \cdot a \cdot \text{Suffix}_a \text{Prefix}_b(w_2) \cdot b \cdot \text{Suffix}_b(w_3)) \right. \\ \left. \bigcup \text{Prefix}_a(w_1) \cdot a \cdot \text{Suffix}_a \text{Suffix}_b(w_3) \right) = \left(\bigcup_{a=b} (w_1 \succ^a \prec w_2) \succ^b \prec w_3 \right) \bigcup \left(\bigcup_{a \neq b} (\text{Prefix}_b \text{Prefix}_a(w_1) \cdot b \cdot \text{Suffix}_b(w_3)) \right. \\ \left. \bigcup \text{Prefix}_a(w_1) \cdot a \cdot \text{Prefix}_b \text{Suffix}_a(w_2) \cdot b \cdot \text{Suffix}_b(w_3) \right) \quad (11)$$

Let

$$A = \bigcup_{a=b} w_1 \succ^a \prec (w_2 \succ^b \prec w_3) \\ = \bigcup_a \{ \text{Prefix}_a(w_1) \cdot a \cdot \text{Suffix}_a(w_3) \cup \text{Prefix}_a(w_1) \cdot a \cdot \text{Suffix}_a \text{Prefix}_a(w_2) \cdot a \cdot \text{Suffix}_a(w_3) \} \\ C = \bigcup_{a=b} (w_1 \succ^a \prec w_2) \succ^b \prec w_3 \\ = \bigcup_a \{ \text{Prefix}_a(w_1) \cdot a \cdot \text{Suffix}_a(w_3) \cup \text{Prefix}_a(w_1) \cdot a \cdot \text{Prefix}_a \text{Suffix}_a(w_2) \cdot a \cdot \text{Suffix}_a(w_3) \}$$

Using equation 9, we define

$$B_1 = \bigcup_{a \neq b} \text{Prefix}_a(w_1) \cdot a \cdot \text{Suffix}_a \text{Prefix}_b(w_2) \cdot b \cdot \text{Suffix}_b(w_3) \\ B_2 = \bigcup_{a \neq b} \text{Prefix}_a(w_1) \cdot a \cdot \text{Suffix}_a \text{Suffix}_b(w_3)$$

Using equation 10, we define

$$D_1 = \bigcup_{a \neq b} \text{Prefix}_a(w_1) \cdot a \cdot \text{Prefix}_b \text{Suffix}_a(w_2) \cdot b \cdot \text{Suffix}_b(w_3) \\ D_2 = \bigcup_{a \neq b} \text{Prefix}_b \text{Prefix}_a(w_1) \cdot b \cdot \text{Suffix}_b(w_3)$$

So from equation 11 it is sufficient to prove that

$$A \cup B_1 \cup B_2 = C \cup D_1 \cup D_2. \quad (12)$$

We prove next two lemmas which are required to prove equation 12.

Lemma 5 $B_2 \subset A$; $D_2 \subset C$.

Proof. We claim; given a word w , $\text{Suffix}_a \text{Suffix}_b(w) \subseteq \text{Suffix}_a(w)$.

Let

$$u \in \text{Suffix}_a(\text{Suffix}_b(w)) \\ \Rightarrow \exists u' \in \Sigma^* \text{ such that } u'au \in \text{Suffix}_b(w) \\ \Rightarrow \exists u'' \in \Sigma^* \text{ such that } u''bu'au = w \\ \Rightarrow w = (u''bu')au \\ \Rightarrow u \in \text{Suffix}_a(w).$$

Similarly we can also prove that $\text{Prefix}_a\text{Prefix}_b(w) \subseteq \text{Prefix}_a(w)$. Note that the other way is not true in general. Therefore

$$\begin{aligned} \text{Prefix}_a(w_1) \cdot a \cdot \text{Suffix}_a\text{Suffix}_b(w_3) &\subseteq \text{Prefix}_a(w_1) \cdot a \cdot \text{Suffix}_a(w_3) \\ &\subset \text{Prefix}_a(w_1) \cdot a \cdot \text{Suffix}_a(w_3) \\ &\cup \text{Prefix}_a(w_1) \cdot a \cdot \text{Suffix}_a\text{Prefix}_a(w_2) \cdot a \cdot \text{Suffix}_a(w_3). \end{aligned}$$

Taking union on both sides over $a \neq b$ we get $B_2 \subset A$.

Similarly, we can prove that $D_2 \subset C$. Hence the proof of lemma.

In Lemma 3, replacing x by single symbol a , we get

$$A = C. \tag{13}$$

By Lemma 5, we have $B_2 \subset A$, and $D_2 \subset C$. Hence from equation 12, it is sufficient to prove that

$$A \cup B_1 = C \cup D_1.$$

Lemma 6 For any word w ,

$$\text{Prefix}_b(\text{Suffix}_a(w)) = \text{Suffix}_a(\text{Prefix}_b(w)).$$

Proof. The proof follows the same line of argument as of lemma 2. Let

$$\begin{aligned} u &\in \text{Prefix}_b(\text{Suffix}_a(w)). \\ \Leftrightarrow \exists u' \in \Sigma^* \text{ such that } ubu' &\in \text{Suffix}_a(w) \\ \Leftrightarrow \exists u'' \in \Sigma^* \text{ such that } u''buau' &= w \\ \Leftrightarrow u''au &\in \text{Prefix}_b(w) \\ \Leftrightarrow u &\in \text{Suffix}_a(\text{Prefix}_b(w)). \end{aligned}$$

Hence the proof.

Using the Lemma 6 it is obvious that

$$B_1 = D_1. \tag{14}$$

Combining equations 13 and 14, we get our required result.

Corollary 5. For any three words $w_1, w_2, w_3 \in \Sigma^*$,

$$w_1 \succ_{\text{I}} (w_2 \succ_{\text{I}} w_3) = (w_1 \succ_{\text{I}} w_2) \succ_{\text{I}} w_3.$$

Proof. By the corollary 1, we have

$$\begin{aligned} w_1 \succ_{\text{I}} (w_2 \succ_{\text{I}} w_3) &= w_1 \succ_{\text{I}} \left(\bigcup_{a \in \Sigma} w_2 \succ_{\text{I}}^a w_3 \right) \\ &= \bigcup_{b \in \Sigma} w_1 \succ_{\text{I}}^b \left(\bigcup_{a \in \Sigma} w_2 \succ_{\text{I}}^a w_3 \right) \\ &= \bigcup_{a, b \in \Sigma} w_1 \succ_{\text{I}}^b (w_2 \succ_{\text{I}}^a w_3). \end{aligned}$$

Similarly from the right hand side we get

$$(w_1 \succ_{\text{I}} w_2) \succ_{\text{I}} w_3 = \bigcup_{a, b \in \Sigma} (w_1 \succ_{\text{I}}^b w_2) \succ_{\text{I}}^a w_3.$$

Using the previous theorem, we have the required equality.

Theorem 5. Any word $w \in 1\text{GSCO}_x^i(L)$ can be written as $w \in 1\text{GSCO}_x(1\text{GSCO}_x^j(L), L)$ for some j .

Proof. Let $w \in 1GSCO_x^i(L)$. By the lemma 4 we get a sequence of words $w_1, w_2, \dots, w_{n+1} \in L$, such that w can be written in the form

$$\begin{aligned}
 w &\in w_1 \succ_x w_2 \succ_x \dots w_n \succ_x w_{n+1} \\
 w &\in (w_1 \succ_x w_2 \succ_x \dots w_n) \succ_x w_{n+1} && \text{by associativity} \\
 \therefore w &\in 1GSCO_x(w_1 \succ_x \dots \succ_x w_n, w_{n+1}) \\
 \Rightarrow w &\in 1GSCO_x(1GSCO_x^n(L), L).
 \end{aligned}$$

Hence the theorem.

The above theorem suggests that the GSCO closure of L can be proposed in another form, which we can call the restricted GSCO closure of L .

Definition 7 The restricted closure of GSCO denoted by $rGSCO^*(L)$ is defined recursively as follows:-

$$\begin{aligned}
 rGSCO^0(L) &= L \\
 rGSCO^{i+1}(L) &= rGSCO(rGSCO^i(L), L) && i \geq 1 \\
 rGSCO^*(L) &= \bigcup_{i \geq 0} rGSCO^i(L)
 \end{aligned}$$

The main difference between $uGSCO^*$ and the $rGSCO^*$ is that, in the later case, crossover takes place between a word produced so far by the crossover and a words which is in L . In the former case, the crossover takes place between any pair of words generated so far. Interestingly the following theorem tells us that, they generate the same language.

Theorem 6. $r1GSCO^*(L) = u1GSCO^*(L)$.

Proof. By definition it follows that

$$r1GSCO^*(L) \subseteq u1GSCO^*(L).$$

Hence it is enough if we show that

$$u1GSCO^*(L) \subseteq r1GSCO^*(L).$$

Let $w \in u1GSCO^*(L)$. Hence $w \in uGSCO^i(L)$ for some i . Hence there exists $w_0, w_1, \dots, w_{2^i-1} \in L$ such that

$$\begin{aligned}
 w &\in ((\dots((w_0 \succ w_1) \succ (w_2 \succ w_3)) \succ \dots \succ (w_{2^i-2} \succ w_{2^i-1})) \dots) \\
 \Rightarrow w &\in w_0 \succ w_1 \succ \dots \succ w_{2^i-1} && \text{Since } \succ \text{ is associative} \\
 \Rightarrow w &\in (\dots((w_0 \succ w_1) \succ w_2) \succ \dots \succ w_{2^n-3}) \succ w_{2^n-2} \succ w_{2^n-1} \\
 \Rightarrow w &\in GSCO(\dots GSCO(\dots(GSCO(GSCO(GSCO(w_0, w_1), w_2), w_3) \dots), w_{2^i-2}), w_{2^i-1})) \\
 \Rightarrow w &\in GSCO(\dots(GSCO(GSCO(L), L) \dots), L) \\
 \Rightarrow w &\in r1GSCO^{2^i-1}(L).
 \end{aligned}$$

Hence the theorem.

Note 3. We can also prove the above theorem by using closure property of $r1GSCO^*(L)$ under the 1-GSCO.

Because of this theorem, we no more distinguish $rGSCO^*(L)$ and $uGSCO^*(L)$ and we simply refer them as $GSCO^*(L)$. The proof also shows that we can construct $GSCO^*(L)$ as follows

$$GSCO^{n+1}(L) = GSCO(L, GSCO^n(L)).$$

6 Regularity of GSCO

Definition 8 (Base of a word) *Base of a word w , denoted by $B(w)$ is the minimal set of words whose iterated crossover generates w in a way that every element of $B(w)$ takes part in GSCO at least once.*

$$B(w) = \{u_1, u_2, \dots, u_k : w \in GSCO^*(\{u_1, u_2, \dots, u_k\})\}.$$

Here the word ‘minimal’ is used in the sense that if there exists $B'(w) = \{u'_1, u'_2, \dots, u'_k, w \in GSCO^*(\{u'_1, u'_2, \dots, u'_k\})\}$ such that $B'(w) \subseteq B(w)$, then $B(w) = B'(w)$.

$B(w)$ is the set of minimal words to generate w by the process of GSCO. $B(w)$ is a finite set for any word w . $B(w)$ need not be unique for a word w . For an example $B(abbbc) = \{ab, bb, bc\}$ and $B(abbbc) = \{abb, bc\}$. $B(w)$ will be called $nB(w)$ if all the words of $B(w)$ are of length n . $nB(w)$ with $n > 2$ is not unique. As an example, the word $w = abbbc$ has two $4B$ sets which are $4B(abbbc) = \{abbb, bbcc\}$ as well as $\{abba, bbcc\}$. For words w such that $|w| = 1, w \in 1B(w)$. It is interesting to note that $2B(w)$ is unique for a word. For $w = a_1a_2 \dots a_k$, $a_i \in \Sigma$, $i = 1, 2, \dots, k$

$$2B(w) = \{a_1a_2, a_2a_3, \dots, a_{k-1}a_k\}.$$

For $a \in \Sigma$, $2B(a)$ is taken as the set $\{a\}$ and $2B(\varepsilon) = \varepsilon$. We define $2B$ of a language L as $2B(L) = \cup_{w \in L} 2B(w)$. For example, $2B(a^+) = \{a, aa\}$.

Theorem 7. *For a language L , $GSCO^*(L)$ is a regular language.*

Proof. Let Σ be the alphabet of L . We define a relation R over $\Sigma^* \times \Sigma^*$ such that

$$xRy \text{ iff } 2B(x) = 2B(y); \quad \Sigma_1(x) = \Sigma_1(y); \quad \Sigma_{|x|}(x) = \Sigma_{|y|}(y).^*$$

Claim 1 : R is a right invariant (with respect to concatenation) equivalence relation.

R is reflexive, since xRx . R is symmetric since $xRy \Rightarrow yRx$. If xRy and yRz , we have $2B(x) = 2B(y)$; $\Sigma_1(x) = \Sigma_1(y)$ and $\Sigma_{|x|}(x) = \Sigma_{|y|}(y)$ and $2B(y) = 2B(z)$; $\Sigma_1(y) = \Sigma_1(z)$; and $\Sigma_{|y|}(y) = \Sigma_{|z|}(z)$. Hence, we have $2B(x) = 2B(z)$; $\Sigma_1(x) = \Sigma_1(z)$; $\Sigma_{|x|}(x) = \Sigma_{|z|}(z)$ implies the transitivity of R . Hence R is an equivalence relation.

Let xRy . So

$$2B(x) = 2B(y); \quad \Sigma_1(x) = \Sigma_1(y); \quad \Sigma_{|x|}(x) = \Sigma_{|y|}(y). \quad (15)$$

Let z be any word.

$$2B(xz) = 2B(x) \cup \{\Sigma_{|x|}(x) \cdot \Sigma_1(z)\} \cup 2B(z).$$

Similarly

$$2B(yz) = 2B(y) \cup \{\Sigma_{|y|}(y) \cdot \Sigma_1(z)\} \cup 2B(z).$$

By 15 we have

$$2B(xz) = 2B(yz); \quad \Sigma_1(xz) = \Sigma_1(yz); \quad \Sigma_{|x|+|z|}(xz) = \Sigma_{|y|+|z|}(yz),$$

which implies $xzRyz$. Hence R is a right invariant with respect to concatenation.

Claim 2 : Number of equivalence classes of R over Σ^* is finite.

Every equivalence classes of Σ^* will have a $2B$ set, a symbol $s \in \Sigma$ and a symbol $e \in \Sigma$ such that the elements in the equivalence class are just the elements of $GSCO^*(2B) \cap s.\Sigma^*.e$. Every equivalence class is parameterized by a $2B$ set, a symbol s (which is the starting symbol of the words in that equivalence class) and the symbol e (which is the ending symbol of the words in that class). We denote an equivalence class by $\langle s, 2B, e \rangle$, $2B \in 2^{\Sigma^2 \setminus \emptyset}$, $s, e \in \Sigma$. For example, if $\Sigma = \{a, b\}$, $abbbb$ will be in the equivalence class $\langle a, \{ab, bb\}, b \rangle$. The words $w \in \Sigma^*$ such that $|w| = 1$, will be related to itself under the relation R and not to any other words other than Σ^* . That is, these words will be in the equivalence class in which only one word w will be present.

* $\Sigma_i(w)$ is the symbol in the i^{th} position of the word w .

The word ' $a \in \Sigma$ ' will be present in one equivalence and no other element will be present in that equivalence class. Similarly, the element ' b ' will be present in one equivalence class. We denote the equivalence classes which has only one element of length one by $\langle a, \{a\}, a \rangle, a \in \Sigma$. The word $\varepsilon \in \Sigma^*$ will be in an equivalence class which will not have any other element of Σ^* in it. Thus we have two categories of equivalence classes.

Category I : $\langle s, 2B, e \rangle, 2B \in 2^{\Sigma^2} \setminus \emptyset, s, e \in \Sigma$.

Category II : $\langle a, \{a\}, a \rangle, a \in \Sigma$.

For every equivalence class of Category I, we have the triple $\langle s, 2B, e \rangle, 2B \in 2^{\Sigma^2} \setminus \emptyset, s, e \in \Sigma$. For every triple $\langle s, 2B, e \rangle, 2B \in 2^{\Sigma^2} \setminus \emptyset, s, e \in \Sigma$, we have an equivalence class of R (some equivalence classes of R over Σ^* may be empty). That is, the triple $\langle s, 2B, e \rangle$ characterizes an equivalence class of R . If $|\Sigma| = n$, $|2^{\Sigma^2} \setminus \emptyset| = 2^{n^2} - 1$. The number of such triples will be $(2^{n^2} - 1) \times n^2$. That is under category I, the total number of equivalence classes of R over Σ^* will be $n^2(2^{n^2} - 1)$. Under category II, the number of equivalence classes will be the number of triples of the form $\langle a, \{a\}, a \rangle, a \in \Sigma, a \in \Sigma \cup \{\varepsilon\}$. Under category II, the total number of equivalence classes are $n + 1$. The total number of equivalence classes of R will be $n^2(2^{n^2} - 1) + (n + 1)$, which is finite since n is finite.

Claim 3 : $GSCO^*(L)$ is the union of some of the equivalence classes of R .

Since $GSCO^*(L) \subset \Sigma^*$, the elements of $GSCO^*(L)$ will be spread out in different equivalence classes of R over Σ^* . $\varepsilon \notin GSCO^*(L)$. If the symbol $a \in \Sigma$ such that $a \in GSCO^*(L)$, then a will be present in the equivalence class $\langle a, \{a\}, a \rangle$ and no other element other than ' a ' will be present in $\langle a, \{a\}, a \rangle$. So the equivalent classes of category II will be contained in $GSCO^*(L)$ if $a \in GSCO^*(L)$.

We prove the following claim to show that, if there is an equivalence class of category I which shares at least one common word with $GSCO^*(L)$, then that equivalence class will be fully contained in $GSCO^*(L)$.

Claim 3(a): If $GSCO^*(L) \cap \langle s, 2B, e \rangle \neq \emptyset$, for some $s, e, 2B$, then $\langle s, 2B, e \rangle \subseteq GSCO^*(L)$.

We have to prove $\langle s, 2B, e \rangle \subseteq GSCO^*(L)$. Suppose the other way. That is, there exists a word w such that $|w| > 1$, $w \in \langle s, 2B, e \rangle$ and $w \notin GSCO^*(L)$. Since $w \in \langle s, 2B, e \rangle$ we have $w \in GSCO^*(2B) \cap s.\Sigma^*.e$. Let $w = a_1a_2 \cdots a_n, |w| > 1$. Here $s = a_1; e = a_n$. $w \in a_1a_2 \succ\prec a_2a_3 \succ\prec \cdots \succ\prec a_{n-1}a_n, a_i a_{i+1} \in 2B, i = 1, 2, 3 \cdots, n - 1$. We want to show that there exists a sequence of words in $GSCO^*(L)$, which by iterative crossover can generate w . The following claim helps us to get such a sequence of words.

Claim 3(b):

1. There exists words $w_i = u_i a_i a_{i+1} v_i \in GSCO^*(L)$, for some $u_i, v_i \in \Sigma^*$.
2. There exists a word $w_1 \in GSCO^*(L)$ such that $a_1 a_2 \in \text{Prefix}(w_1)$.
3. There exists a word $w_{n-1} \in GSCO^*(L)$ such that $a_{n-1} a_n \in \text{Suffix}(w_{n-1})$.

Elements of $2B$ (which is under consideration in Claim 3(a)) are in $2B(GSCO^*(L))$. That is, there exists a word of the form $ua_1a_2v \in GSCO^*(L)$.

Since the first symbol of w is a_1 , $s = a_1$, there exists a word $a_1t \in GSCO^*(L)$, $t \in \Sigma^*$. Since $GSCO^*(L)$ is a crossover language and $a_1t, ua_1a_2v \in GSCO^*(L)$, $a_1a_2v \in a_1t \succ\prec ua_1a_2v \in GSCO^*(L)$. We write $w_1 = a_1a_2v \in GSCO^*(L)$. Similarly, there exists a word $w_{n-1} = v'a_{n-1}a_n \in GSCO^*(L)$, for some $v' \in \Sigma^*$.

The set $2B$ (which is under consideration) contains all the sub words of length 2 of some words in $GSCO^*(L)$. (that is, the set $2B$ contains all the sub words of length 2 for the words which are present in the equivalence class $\langle s, 2B, e \rangle$. For each $a_i a_{i+1} \in 2B, i = 1, 2, 3 \cdots, (n - 2)$, there exists a word $w_i = u_i a_i a_{i+1} v_i \in GSCO^*(L)$, for some $u_i, v_i \in \Sigma^*$ (w_i 's need not be distinct). Thus we have a sequence of words $w_i \in GSCO^*(L)$. Thus we have the claim 3(b).

Clearly $a_1a_2a_3 \cdots a_n \in a_1a_2v \succ\prec u_2a_2a_3 \cdots \succ\prec v'a_{n-1}a_n$. That is, $w \in w_1 \succ\prec w_2 \succ\prec \cdots w_n, w_i \in GSCO^*(L)$. Thus, $w \in GSCO^*(L)$, which contradicts with the assumption that $w \notin GSCO^*(L)$. Hence, we have the claim 3(a).

Thus, we have, for every $a \in GSCO^*(L)$ (such that $a \in \Sigma$), the equivalence class of category II which contains a , viz., $\langle a, \{a\}, a \rangle$ will be fully contained in $GSCO^*(L)$ since $\langle a, \{a\}, a \rangle$ contains only one element a . For every $w \in GSCO^*(L)$, $|w| > 1$, the equivalence class (of category I) which contains w , viz., $\langle s, 2B, e \rangle$ will

be fully contained in $GSCO^*(L)$. Thus,

$$GSCO^*(L) = \left(\bigcup_{a \in GSCO^*(L) \cap \Sigma} \langle a, \{a\}, a \rangle \right) \bigcup \left(\bigcup_{w \in GSCO^*(L) \cap \{s, 2B, e\}} \langle s, 2B, e \rangle \right).$$

We know that R is of finite index. Hence, $GSCO^*(L)$ is the union of some of the equivalence classes of a right invariant equivalence relation of finite index. Thus, by Myhill - Nerode theorem, $GSCO^*(L)$ is regular.

The converse of this theorem is not true, i.e. not all regular language can be obtained by using GSCO. We give a counter example in example 7.

Definition 9 A language L is said to be a crossover language if there exist a set L' such that $GSCO^*(L') = L$. That is, L is called an crossover language if L can be got by the iterated GSCO process of some set L' .

Example 6. 1. $L = \{a, b\}$ is a crossover language $GSCO^*(L) = \{a, b\}$.
2. $L = a^+b^+$ is a crossover language since $GSCO^*(\{aabb, aaabbb\}) = a^+b^+$

Remark 1 All crossover languages are regular and no crossover language will contain ε (word of length 0)

Theorem 8. A language L is said to be a crossover language if and only if L is closed with respect to the operation GSCO.

Proof. Given L is a crossover language. Then there exist a language L' such that $GSCO^*(L') = L$. Let $x, y \in L$. Then $x, y \in GSCO^*(L')$. $GSCO(x, y) \in GSCO^*(L')$ since $GSCO^*(L')$ is the transitive closure of GSCO. Hence, $GSCO(x, y) \in L$, since $GSCO^*(L') = L$.

The other way proof :

Suppose L is closed with respect to GSCO. $GSCO(x, y) \in L$, for every $x, y \in L$. $GSCO(GSCO(x, y), z) \in L, \forall x, y, z \in L$. That is, $GSCO^2(L) \subseteq L$. Continuing like this, we have $GSCO^i(L) \subseteq L, i \geq 0$. Then, $\bigcup_i GSCO^i(L) \subseteq L$, and $L \subseteq \bigcup_i GSCO^i(L)$. Hence $GSCO^*(L) = L$ which implies that L is a crossover language.

Example 7. The language $L = \{a^{2n} : n \geq 1\}$ is a regular language. However it is not a GSCO language as it is not closed under GSCO operation. $a^3 \in a^2 \succ a^2$ but $a^3 \notin L$.

Theorem 9. For any crossover language L , there exists three finite sets, $S, E \subseteq \Sigma, B \subseteq \Sigma^2$ such that

$$L = (GSCO^*(B) \cap S\Sigma^*E) \bigcup (L \cap \Sigma)$$

Proof. Given a crossover language L , L will not contain ε . Since L is regular, we can find a right-linear grammar $G = (N, T, P, S)$ such that G generates L . Without loss of any generality, let G be a grammar without ε -productions (since L does not have ε), unit productions and any useless symbols. We construct a set B (called the *Base set* of L) as follows.

1. For every production $S \rightarrow a \in P, a \in T$; include $a \in B$.
2. For every pair of productions $X \rightarrow aA, A \rightarrow bB \in P; a, b \in T; A, B, X \in N$; include $ab \in B$.
3. For every pair of productions $X \rightarrow aA, A \rightarrow b \in P; a, b \in T; A, X \in N$; include $ab \in B$.

The construction of B tells that the set B contains all the sub words of length 2 of L . We construct the set S (Start symbol set) and E (end symbol set) as follows.

1. For a production $S \rightarrow a$, include $a \in S$
2. For a production $S \rightarrow aA$, include $a \in S$
3. For a production $A \rightarrow a$, include $a \in E$

S and E will have the first and the last symbol of the words of L .

Case I: All the words in L of length greater than or equal to 2 are in $GSCO^*(B) \cap S\Sigma^*E$ and vice-versa.

Part I : Let $w = a_1a_2 \dots a_n \in L$, $|w| \geq 2$. Then $w \in a_1a_2 >_T < a_2a_3 >_T < \dots >_T < a_{n-1}a_n$. Since $w \in L$, $a_1 \in S$ and $a_n \in E$. Here, $a_i a_{i+1}$, $i = 1, 2, \dots (n-1)$, are the sub words of L of length 2. This implies $a_i a_{i+1} \in B$, $\forall i$. $w \in GSCO^*(B)$ and $w \in S\Sigma^*E$. Thus, we have $w \in GSCO^*(B) \cap S\Sigma^*E$.

Part II: Let $w \in GSCO^*(B) \cap S\Sigma^*E$. Let $w = a_1a_2 \dots a_n$, $a_1 \in S$ and $a_n \in E$. $w \in a_1a_2 >_T < a_2a_3 >_T < \dots >_T < a_{n-1}a_n$, $a_i a_{i+1} \in B$, $1 \leq i \leq n-1$. We claim now that there exists a word $w_1 \in L$ such that $a_1a_2 \in \text{Prefix}(w_1)$. Here, $a_1a_2 \in B$. Since B contains all the sub words of L of length 2, there exists a word of the form $ua_1a_2v \in L$, $u, v \in \Sigma^*$. Since $a_1 \in S$, there exist a word $a_1t \in L$. Further, $a_1t >_T < ua_1a_2v \subseteq L$. That is, $a_1a_2u \in L$. Thus, we have the claim of the existence of $w_1 \in L$ whose prefix is a_1a_2 . Similarly, we can prove that there exists a word $w_{n-1} = va_{n-1}a_n$ in L . Since B contains all the sub words of L of length 2, for each $a_i a_{i+1}$, $i = 2, 3, \dots (n-2)$, there exists a word $w_i = u_i a_i a_{i+1} v_i \in L$. Thus, we have a sequence of words $w_i \in L$, $i = 1, 2, \dots n$. Clearly, $a_1 \dots a_n \in a_1a_2u >_T < u_2a_2a_3v_2 >_T < \dots va_{n-1}a_n$. That is, $w \in w_1 >_T < w_2 \dots >_T < w_n$, $w_1, w_2, \dots w_n \in L$. Since L is a crossover language, $w \in GSCO^*(L) \subseteq L$. Hence, $w \in L$.

Case II: All the words in L of length equal to 1 are in $L \cap \Sigma$ and vice-versa.

Since $GSCO^*(B) \cap S\Sigma^*E$ contains only words in L of length ≥ 2 , it is clear that the words $w \in L$ of length 1 are in $L \cap \Sigma$.

Hence

$$L = (GSCO^*(B) \cap S\Sigma^*E) \cup (L \cap \Sigma)$$

Corollary 6. If $L \cap \Sigma = \emptyset$ (that is, L does not contain any word of length 1), then $L = GSCO^*(B) \cap S\Sigma^*E$

Proof is immediate.

Corollary 7. Let Σ be an alphabet. If all the words in L are of the form $\Sigma\Sigma^*\Sigma$, (that is, if L contains words which starts with all the possible symbols and ends with all the symbols, then $L = GSCO^*(B)$

Proof is immediate since $S = \Sigma = E$

Given a crossover language L , the above theorem gives the construction of the set B with which one can generate L by the iterative $GSCO$. The base set of a crossover language L will have all the sub words of L of length 2 along with the words of length 1 in L where as the $2B$ set of L will contain all the sub words of L of length 2, words of L of length 1 and ε (word of length 0) if ε is in L . In other words, if L does not contain ε , then the base set of L and $2B(L)$ will be the same. The next lemma shows that the base set of a crossover language is unique.

Lemma 1. The base set of a crossover language is unique.

Proof is obvious.

7 Comparison with other sub-regular families

Since $GSCO^*(L)$ is a subclass of regular languages, in this section, we compare the various subclasses of regular languages with the crossover language. For this purpose, we consider different classes of crossover languages as follows.

Definition 10 We define the following classes of crossover languages based on R , the set of overlapping. Let Σ be the alphabet of the axiom.

TSyGSCO Class of languages that can be generated by the operation $GSCO_R^*$ over an axiom, where $R = \Sigma$.

SyGSCO Class of languages that can be generated by the operation $GSCO_R^*$ over an axiom, where $R \subseteq \Sigma$.

StGSCO Class of languages that can be generated by the operation $GSCO_R^*$ over an axiom, where $R \subseteq \Sigma^+$.

TStGSCO Class of languages that can be generated by the operation $GSCO_R$ over an axiom, where $R = \Sigma^+$.

Theorem 10. 1. $TSyGSCO \subset SyGSCO$
 2. $SyGSCO \subset StGSCO$
 3. $TStGSCO \subset StGSCO$
 4. $TStGSCO = TSyGSCO$

Proof. Let $L \in TSyGSCO$. Then there exists a set R and a set L_0 such that $L = GSCO_R^*(L_0)$, where R is the alphabet of L_0 . That is, L is generated by the crossover where all the overlapping are over the symbols of the alphabet of L . We have $L = GSCO_R^*(L_0)$, $R \subseteq \text{alphabet of } L_0$, which implies $L \in SyGSCO$. The other way is not true. The language $a^+b^2 \in SyGSCO$, because $a^+b^2 = GSCO_a(a^+b^2)$. But, $a^+b^2 \notin TSyGSCO$, since the language a^+b^2 is not closed w.r.t the operation $GSCO_b$.

Let $L \in SyGSCO$. Then there exist a set R and a set L_0 such that $L = GSCO_R^*(L_0)$, $R \subset \Sigma_L$. Since $R \subset \Sigma_L$, $R \subset \Sigma_L^*$. This implies $L \in StGSCO$. The other way is not true. $(aa)^+b^2(aa)^+ \in SyGSCO$ with respect to $R = \{b^2\}$. However this language is not closed with respect to any symbol.

Let $L \in TStGSCO$. Then there exist an L_0, R such that $L = GSCO_R^*L_0$, where $R = \text{sub}(L_0)$. Since $R \subset \Sigma_{L_0}^*$, $L \in SyGSCO$. The other way is not true. The language $a^+b^2 \in StGSCO_R$ where $R = \{b^2\}$, but it is not in $TStGSCO$.

Immediate from corollary 1.

We examine now the relationships of class of GSCO languages with a series of well-known subfamilies of REG , considered in [18, 26, 19].

Definition 11 A language $L \subseteq \Sigma^*$ is called

Combinational if and only if $L = \Sigma^*U$, for some $U \subset \Sigma$;

Definite if and only if $L = L_1 \cup \Sigma^*L_2$, where L_1, L_2 are finite subsets of Σ^* ;

Nil-potent if and only if either L or $\Sigma^* - L$ is finite;

Commutative if and only if $x \in L$ implies that all permutations of x are in L ;

Suffix-closed if and only if $\text{Suffix}(L) \subset L$

Non-counting (extended star-free) if and only if there is an integer $k \geq 1$ such that for every $x, y, z \in \Sigma^*$, $y \neq \varepsilon$, we have $xy^kz \in L$

Power-separating if and only if for each $x \in \Sigma^*$ there is a natural number $m \geq 1$ such that either $L \cap \{x^n \mid n \geq m\} = \emptyset$ or $\{x^n \mid n \geq m\} \subset L$.

Ordered if and only if L is accepted by some deterministic finite automaton $(K, \Sigma, \delta, s_0, F)$ with a totally ordered set of states K , such that for each $a \in \Sigma$, the relation $s \leq s'$ implies $\delta(s, a) \leq \delta(s', a)$.

We denote by $COMB, DEF, NIL, COMM, SUF, ESF, PS, ORD$ the families of combinational, definite, nilpotent, commutative, suffix-closed, non-counting, power-separating and ordered languages. The relation between the different type of GSCO classes and the above sub classes are given in the figure 3.

Theorem 11. $SH = SyGSCO$; $NCH = StGSCO$.

Proof. We have to show that a language L which can be generated by a simple splicing system can also be generated by $StGSCO$ and vice versa. For that, it is enough if we show that, for any axiom A , there exists a language L_0 such that

$$\sigma^*(A) = GSCO_R^*(L_0),$$

for some R and vice versa. We use the method of induction. Consider $\sigma_R^i(A)$, R is the subset of the alphabet of A where σ is the splicing scheme of a simple splicing system. Let $L_0 = A$. $x \in L$ implies $x \in \sigma_R^i(A)$, $i \geq 0$. If $i = 0$, $x \in A = L_0$. We assume that for an $i > 0$, $y \in \sigma_R^i(A)$, we have that $y \in GSCO_R^*(L_0)$. Let $w \in \sigma_R^{i+1}(A)$. Then, there exist $w_1, w_2 \in \sigma_R^i(A)$ such that $(w_1, w_2) \vdash_a w$, $a \in R$. That is, $w_1 = u_1au_2, w_2 = v_1av_2, w = u_1av_2$. By the process of induction, $u_1au_2, v_1av_2 \in GSCO_R^*(L_0)$. Then $GSCO_R(u_1au_2, v_1av_2) = u_1av_2 = w \in GSCO_R^*(L_0)$. Hence, $\sigma^*(A) \subseteq GSCO_R^*(L_0)$.

On the other hand, consider $GSCO_R^*(L_0)$ where R is a subset of the alphabet of L_0 . Let $w \in GSCO_R^*(L_0)$. So $w \in GSCO_R^i(L_0)$ for some i . Let us put $L_0 = A$.

If $i = 0$, then $w \in \sigma_R^0(A)$ holds trivially. Using the induction hypothesis, assume that any $y \in GSCO^i(L_0)$, $y \in \sigma_R^*(A)$.

Let $w \in GSCO^{i+1}(L_0)$. So, $w \in GSCO(w_1, w_2)$, where $w_1, w_2 \in GSCO^i(L_0)$. So there exists an $a \in R$ such that $w \in GSCO_R(w_1, w_2)$, $a \in R$ i.e. $w_1 = u_1au_2$, $w_2 = v_1av_2$ and $w = u_1av_2$.

By the process of induction, both $w_1 \in \sigma_R^*(A)$ and $w_2 \in \sigma_R^*(A)$ implies $w \in \sigma_R^*(A)$ since $(w_1, w_2) \vdash_a w$. Hence $GSCO_R^*(L_0) \subseteq \sigma^*(A)$, which proves $SH = SyGSCO$. Similarly, we can prove $NCH = StGSCO$.

Theorem 12. $L \in TSyGSCO$ if and only if L is closed with respect to the operation $GSCO_a \forall a \in \Sigma_L$ (alphabet of L).

Proof. Let $L \in TSyGSCO$. Hence there exists a set L_0 such that $L = GSCO_R^*(L_0)$, $R = \Sigma$. This implies, L is closed with respect to $GSCO_a$, $\forall a \in \Sigma_L$.

Let L is closed with respect to the operation $GSCO_a$, $\forall a \in \Sigma$, i.e. $GSCO_a(x, y) \in L \forall x, y \in L$ and $\forall a \in \Sigma$. This implies $GSCO_a^1(L) \subseteq L$. Now $GSCO_a(GSCO_a(x, y), z) \in L \forall x, y, z \in L$, i.e. $GSCO_a^2(L) \subseteq L$.

Continuing on the same line, we get

$$\begin{aligned} GSCO_a^i(L) &\subseteq L \\ \Rightarrow \bigcup_i GSCO_a^i(L) &\subseteq L. \end{aligned}$$

Since we have $L \subseteq \bigcup_i GSCO_a^i(L)$, we conclude

$$GSCO^*(L) = L,$$

i.e. L is a $TSyGSCO$.

Theorem 13. $L \in StGSCO$ if and only if $\exists R \in \Sigma_L^*$ such that L is closed with respect to the operation $GSCO_R$.

Proof. $L \in StGSCO$, implies $\exists$ a set L_0 and R such that

$$L = GSCO_R^*(L_0), \quad R \subseteq \Sigma_L^*.$$

Hence L is closed with respect to the operation $GSCO_R$.

For $R \subseteq \Sigma_L^*$. Let L be closed with respect to the operation $GSCO_R$. So,

$$\begin{aligned} \forall x, y \in L \quad GSCO_R(x, y) &= z \in L. \\ \text{i.e. } GSCO(GSCO_R(x, y), z) &\subseteq L, \forall x, y, z \in L \\ \text{i.e. } GSCO^2(L) &\subseteq L. \end{aligned}$$

Continuing on the same lines,

$$\begin{aligned} GSCO^i(L) &\subseteq L, \forall i \geq 0 \\ \bigcup_i GSCO^i(L) &\subseteq L \\ \Rightarrow GSCO_R^*(L) &\subseteq L \end{aligned}$$

Hence, we can conclude that

$$L = GSCO_R^*(L).$$

Head has proved that $NCH=SLT$ [13]. Thus we have the following theorem whose proof is immediate.

Theorem 14. $L \in SLT$ if and only if there exists $R \subseteq \Sigma_L^*$ such that L is closed with respect to the operation $GSCO_R$.

Theorem 15. $SLT \subset ESF$

Proof. Let $L \in SLT$. Then, there exist $k, w \in \Sigma^k$ such that w is a constant for L . That is, $xwy, pwq \in L$ implies $xwq, pwy \in L$. Consider $xy^l z \in L$. Then, $xyy^k z, xy^k yz \in L$ implies that $xy^{k+2} z \in L$. Hence $xy^{l+1} z \in L$ which implies $L \in ESF$. Hence $SLT \in ESF$. But the converse is not true. The language $\{abb^+c, pbb^+q\}$ is ESF, but for no $k \geq 1$, SLT property holds.

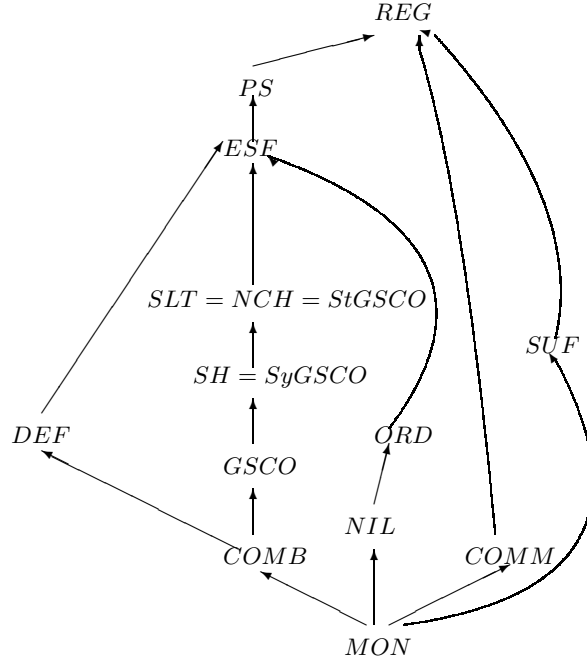


Fig. 3. Relations between different subclasses of the regular language and their relations with *GSCO*

Theorem 16. *The relations in figure 3 hold; The arrows indicate strict inclusions and every two families not linked by a path in this diagram are incomparable.*

Proof. This diagram appears in [19] with out the *GSCO* classes. Hence all relations between families other than *GSCO* classes are known.

1. $COMB \subset TSyGSCO$. Let $L \in COMB$, i.e. $L = \Sigma^*U$, $U \subseteq \Sigma$. Σ^*U is closed with respect to the *GSCO* operation. This implies Σ^*U is a crossover language. Hence $L \in TSyGSCO$.
This inclusion is strict. $a^*b^* \in TSyGSCO$ but $\notin COMB$.
2. *DEF* and *TSyGSCO* are incomparable.
 $ab^+ \in TSyGSCO - DEF$. $(a+b)^+aabb \in DEF - TSyGSCO$. Since $(a+b)^+aabb$ is not a crossover language.
3. *TSyGSCO* and *NIL* are incomparable.
 $\{a^2, a^3\} \in NIL - TSyGSCO$. $a^*b^* \in TSyGSCO - NIL$.
4. *TSyGSCO* and *COMM* are incomparable.
 $\{ab, ba\} \in COMM - TSyGSCO$. The other way is obvious.

8 Conclusion

We have presented a new operation *GSCO* over words and languages, which in some sense abstracts the cross-over of chromosomes in the living organisms. This study of *GSCO* reveals many interesting results, such as $GSCO^*(L)$ is regular for any L . This result could be useful in places where a generation of regular languages are required.

we conclude this paper by pointing out some further directions of research. A study of generalised parallel cross over of words and languages, where the parallelism is allowed, (i.e. cross over may occur more than one places) can be initiated and a comparison between the generalised sequential crossover and generalised parallel crossover has the potential of bringing results of worth.

Though this study has come out with a characterisation of strictly locally testable languages (SLT) in terms of *GSCO*, this result does not compare the characterisations of SLT, which are available earlier with the newly

obtained one. That is, the characterisations of SLT could be compared in the sense of complexity, which is worth investigating.

In our opinion the construction of B set can be used for data compression in the following sense. To store a crossover language L , which is closed under $GSCO$, it is sufficient to store the sets B , S , E . L can be retrieved from these by iterated $GSCO$ operation.

References

1. L. Adleman; Molecular computations of solutions to combinatorial problems, *Science*, **266**, 1021-1024, 1994.
2. L. Adleman; Towards a mathematical theory of self-assembly, *Technical Report (00-72)*, University of South California, 2000.
3. Arto Saloma; Formal Languages, Academic Press Inc. 1973.
4. P Bottoni; A Labella, V Manca, Superposition based on Watson-Creek like complementarity, *Theory of computing systems*, **34 (4)**, 503-524, 2006.
5. T H LaBeau, E Winfree, J H Rief; Experimental progress in computation by self-assembly of DNA tilings, *Proc. 5th international meeting on DNA based computation, MIT*, ed. E Winfree and D Gifford, 121-138, 1999.
6. Karel Culik II, Tero Harju; Splicing semi-groups of dominoes and DNA, *Discrete Applied Mathematics*, **31 (3)**, 261-277, 1991.
7. Erzsébet Csuhaj-Varjú, Ion Petre, György Vaszil; Self assembly of strings and languages, *Theoretical Computer Science*, **374 (1-3)**, 74-81, 2007.
8. Al Căărăușu, Gh Păun; String intersection and short concatenation, *Rev. Mod. Math. Pures. Appl.*, **26**, 713-726, 1981.
9. G Dassow, H Hornig; Conditional grammars with sub-regular conditions, *Words, language, combinatorics II*, ed. M Ito and H Jürgensen, 71-86, World Scientific, Singapore, 1994.
10. D Faulhammer, A R Cukras, R J Lipton, L F Landweber; Molecular computation: RNA solution to chess problem, *Proc. Nat. Acad. Sci.*, **97 (4)**, 1385-1389, 2000.
11. J S Golan; The theory of semirings with applications in Mathematics and Theoretical Computer Science, Longman Scientific and Technical, New York, 1994.
12. Tom Head; Formal language theory and DNA : An analysis of the generative capacity of specific recombinant behaviours, *Bull. Math. Biology*, **49**, 737-759, 1987.
13. Tom Head; Splicing representations of strictly locally testabel languages, *Discrete Appl. Math.*, **87, 1-3**, 139-147, 1998.
14. John Hopcroft, Rajeev Motwani, Jeffrey Ullman; Introduction to automata theory, languages, and computation (2e), Pearson Indian reprint, 2001.
15. L Jeganathan, R Rama, Ritabrata Sengupta; A proposal to a generalised splicing with a self-assembly approach, *Pre-Proc. 14th international meeting on DNA based computation*, 2008.
16. M G Lagoudakis, T H LaBean; 2D DNA self-assembly for satisfiability, *Proc. 5th international meeting on DNA based computation, MIT*, ed. E Winfree and D Gifford, 139-152, 1999.
17. A DeLuca, A Restivo; A characterisation of strictly locally testable languages and its application to sub-semigroups of a free semigroup, *Information and control*, **44**, 300-319, 1980.
18. R McNaughton, S Papert; Counter free automata, MIT Press, Cambridge, Mass., 1971.
19. A Mateescu, Gh Păun, A Salomaa; Simple splicing systems, *Disc. App. Math.*, **44**, 300-319, 1980.
20. L.Llie, V.Mitrana; Crossing-over on languages: A formal representation of the recombination of genes in a chromosome.
21. V.Mitrana; Crossover systems : a language theoretic approach to DNA recombinations, *Proc. First IEEE symp. Intelligence in Neural and Biological systems*, washington, 1995.
22. Q Ouyang, P D Kaplan, S Lieu, A Libchabvi; DNA solution of natural clique problem, *Science*, **278**, 446-449, 1997.
23. Gh. Păun; On the Splicing operation, *Discrete Applied Mathematics*, **70**, 57-79, 1996.
24. Gh.Păun, Grzegorz Rozenberg, Arto Salomaa; Computing by Splicing, *Theoretical Computer Science*, **168(2)**, 321-336, 1996.
25. Gh. Păun, Grzegorz Rozenberg, Arto Salomaa; DNA Computing : New Computing Paradigms, Springer-Verlag, 1998.
26. M P Schutzenberger; Sur certaines operations de fermeture dans les langages, *Symposium Mathematica*, **15**, 245-253, 1975.
27. E Winfree, X Yang, N C Seeman; Universal computation via self-assembly of DNA; some theory and experiments, *DNA based computation II*, ed. L F Landweber and E B Baun, **DIMACS, AMS**, 191-213, 1999.
28. E Winfree, T Eng, G Rozenberg; String tiles models for DNA computing by self-assembly, *Pre-proc. of 6th international meeting on DNA based computing, Leiden*, ed. A Condon and G Rozenberg, 65-84, 2000.
29. E Winfree; Algorithmic self-assembly of DNA, PhD thesis, Caltech, 1998.